



HTP



HBA



HIGH PRESSURE AXIAL FANS



HTP

Cased high-pressure axial fans

Robust cased axial high-pressure fans, especially designed for mining installations with large losses of load



High-pressure impeller

Fan:

- Sheet steel thick long casing
- Motor base welded to the casing
- Guidelines for high aerodynamic performance for pressure gain
- Optimum surface protection by means of high-quality steel.
- High-performance, cast aluminium impeller.
- Airflow direction from impeller to motor
- Electrical connection in outside terminal board.

Motor:

- Single-phase two-speed motors with IE-2 efficiency, except lower powers 0.75 kW.
- Class F motors with ball bearings, IP-55 protection
- Three-phase 230/400V.-50Hz (up to 5.5CV) and 400/690V.-50Hz. (power over 5.5CV)
- Working temperature: -20°C +70°C


Finish:

- High-protection, anti-corrosion steel, specially primed and high-quality paint for corrosive environments.

On request:

- Standardised IP-55 motors, ATEX motors and two speeds
- Made entirely from stainless steel.
- Hot-rolled galvanised steel construction

Order code

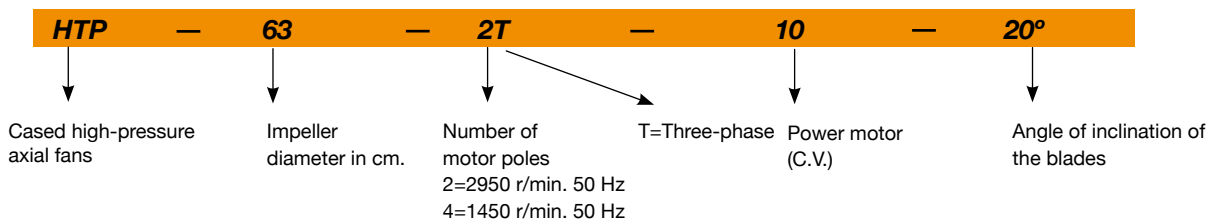

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)			Installed power (kW)	Maximum airflow (m ³ /h)	Approx. weight (Kg)	NPS dB(A)
		230V	400V	690V				
HTP-50-2T-4	2920	10,09	5,80	-	3,00	13850	49	82
HTP-50-2T-5,5	2920	13,22	7,60	-	4,00	16450	65	83
HTP-56-2T-5,5	2920	13,22	7,60	-	4,00	18050	69	88
HTP-56-2T-10	2920	-	14,00	8,12	7,50	25500	147	89
HTP-63-2T-10	2920	-	14,00	8,12	7,50	23850	132	94
HTP-63-2T-15	2950	-	19,20	11,13	11,00	29400	167	94
HTP-63-2T-20	2950	-	26,00	15,07	15,00	34400	181	97
HTP-63-2T-25	2950	-	31,50	18,26	18,50	37200	199	98
HTP-63-2T-30	2950	-	39,50	22,90	22,00	39800	208	99
HTP-63-4T-1,5	1430	4,17	2,40	-	1,10	12850	92	79
HTP-63-4T-2	1430	5,74	3,30	-	1,50	15650	93	79
HTP-63-4T-3	1450	8,00	4,60	-	2,20	18600	101	83
HTP-63-4T-4	1450	10,96	6,30	-	3,00	19900	104	84
HTP-71-2T-15	2950	-	19,20	11,13	11,00	32850	184	93
HTP-71-2T-20	2950	-	26,00	15,07	15,00	39250	198	95
HTP-71-2T-25	2950	-	31,50	18,26	18,50	43450	216	95
HTP-71-2T-30	2950	-	39,50	22,90	22,00	45500	225	95
HTP-71-2T-40	2950	-	51,60	29,91	30,00	52550	303	98
HTP-71-4T-2	1430	5,74	3,30	-	1,50	17500	110	83
HTP-71-4T-3	1450	8,00	4,60	-	2,20	20650	118	83
HTP-71-4T-4	1450	10,96	6,30	-	3,00	23950	121	84

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)			Installed power (kW)	Maximum airflow (m³/h)	Approx. weight (Kg)	NPS dB(A)
		230V	400V	690V				
HTP-71-4T-5,5	1450	15,30	8,80	-	4,00	27400	127	87
HTP-71-4T-7,5	1450	-	11,20	6,49	5,50	31700	141	90
HTP-80-4T-4	1450	10,96	6,30	-	3,00	19300	146	86
HTP-80-4T-5,5	1450	15,30	8,80	-	4,00	22850	152	86
HTP-80-4T-7,5	1450	-	11,20	6,49	5,50	28000	166	86
HTP-80-4T-10	1450	-	15,30	8,87	7,50	31500	177	87
HTP-80-4T-15	1450	-	20,90	12,12	11,00	40000	217	91
HTP-90-4T-7,5	1450	-	11,20	6,49	5,50	27450	196	90
HTP-90-4T-10	1450	-	15,30	8,87	7,50	32500	207	90
HTP-90-4T-15	1450	-	20,90	12,12	11,00	42200	247	90
HTP-90-4T-20	1450	-	28,50	16,52	15,00	50050	266	94
HTP-90-4T-25	1480	-	34,50	20,00	18,50	54550	294	95
HTP-90-4T-30	1480	-	40,90	23,71	22,00	61750	311	97
HTP-100-4T-15	1450	-	20,90	12,12	11,00	46100	282	93
HTP-100-4T-20	1450	-	28,50	16,52	15,00	56300	301	93
HTP-100-4T-25	1480	-	34,50	20,00	18,50	59900	329	93
HTP-100-4T-30	1480	-	40,90	23,71	22,00	69900	346	96
HTP-100-4T-40	1480	-	55,30	32,06	30,00	80500	401	98
HTP-125-4T-40	1480	-	55,30	32,06	30,00	81000	503	100
HTP-125-4T-50	1480	-	68,00	39,42	37,00	96800	525	100
HTP-125-4T-60	1480	-	81,30	47,13	45,00	105050	558	100
HTP-125-4T-75	1480	-	98,90	57,33	55,00	127800	599	100
HTP-125-4T-100	1480	-	135,00	78,26	75,00	147350	674	104
HTP-125-4T-125	1480	-	163,00	94,49	90,00	156800	703	105


Acoustic features

The specified values are determined according to free field measurements of pressure and sound levels in dB(A) at an equivalent distance of twice the fan's span plus the impeller's diameter, with a minimum of 1.5 m.

Sound power Lw(A) spectrum in dB(A) via frequency band in Hz.

Model	LpdB(A)	63	125	250	500	1000	2000	4000	8000	Model	63	125	250	500	1000	2000	4000	8000	
HTP-50-2T-4	80	57	77	85	90	92	89	82	71	HTP-80-4T-4	86	58	75	86	95	96	96	93	86
HTP-50-2T-5,5	81	58	78	86	91	93	90	83	72	HTP-80-4T-5,5	86	58	76	86	95	96	96	93	86
HTP-56-2T-5,5	86	63	83	91	96	98	95	88	77	HTP-80-4T-7,5	86	58	76	86	95	96	96	93	86
HTP-56-2T-10	87	64	84	92	97	99	96	89	78	HTP-80-4T-10	87	59	77	87	97	98	98	94	88
HTP-63-2T-10	94	70	82	92	104	105	104	99	91	HTP-80-4T-15	91	63	81	91	101	102	102	99	92
HTP-63-2T-15	94	70	82	92	104	105	104	99	91	HTP-90-4T-7,5	90	62	79	90	99	100	100	97	90
HTP-63-2T-20	97	73	85	95	107	108	107	102	94	HTP-90-4T-10	90	62	80	90	99	100	100	97	90
HTP-63-2T-25	98	74	86	96	108	109	108	103	95	HTP-90-4T-15	90	62	80	90	100	101	101	98	91
HTP-63-2T-30	99	75	87	97	109	110	109	104	96	HTP-90-4T-20	94	66	83	94	103	104	104	101	94
HTP-63-4T-1,5	79	55	67	77	89	90	89	84	76	HTP-90-4T-25	95	67	85	95	104	105	105	102	95
HTP-63-4T-2	79	55	67	77	89	90	89	84	76	HTP-90-4T-30	97	69	87	97	107	108	108	104	98
HTP-63-4T-3	83	59	71	81	93	94	93	88	80	HTP-100-4T-15	93	65	83	93	102	103	103	100	93
HTP-63-4T-4	84	60	72	82	94	95	94	89	81	HTP-100-4T-20	93	65	82	93	102	103	103	100	93
HTP-71-2T-15	93	65	83	93	102	104	103	100	93	HTP-100-4T-25	93	65	83	93	102	103	103	100	93
HTP-71-2T-20	95	67	85	95	104	106	105	102	95	HTP-100-4T-30	96	67	85	96	105	106	106	103	96
HTP-71-2T-25	95	67	85	95	104	106	105	102	95	HTP-100-4T-40	98	70	88	98	107	108	108	105	98
HTP-71-2T-30	95	67	85	95	104	106	105	102	95	HTP-125-4T-40	100	72	89	100	109	110	110	107	100
HTP-71-2T-40	98	70	88	98	107	109	108	105	98	HTP-125-4T-50	100	72	90	100	109	110	110	107	100
HTP-71-4T-2	83	55	73	83	92	93	93	90	83	HTP-125-4T-60	100	72	89	100	109	110	110	107	100
HTP-71-4T-3	83	55	72	83	92	93	93	90	83	HTP-125-4T-75	100	72	90	100	110	111	111	108	101
HTP-71-4T-4	84	56	74	84	94	95	95	91	85	HTP-125-4T-100	104	76	93	104	113	114	114	111	104
HTP-71-4T-5,5	87	59	77	87	97	98	98	95	88	HTP-125-4T-125	105	77	95	105	114	115	115	112	105
HTP-71-4T-7,5	90	62	80	90	100	101	101	97	91										

Dimensions in mm

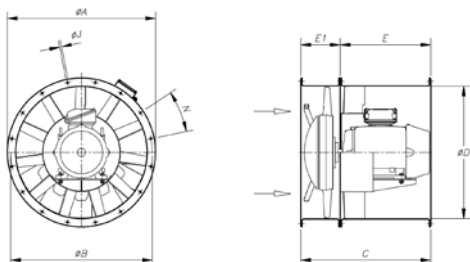

Model	Power	ØA	ØB	ØD	E	E1	C	ØJ	N
HTP-50-2T		600	560	514	-	-	500	12	12x30°
HTP-56-2T		660	620	560	-	-	500	12	12x30°
HTP-63-2T		730	690	640	650	220	870	12	12x30°
HTP-63-4T		730	690	640	340	220	560	12	12x30°
HTP-71-2T		810	770	710	700	240	940	12	16x22°30'
HTP-71-4T		810	770	710	420	240	660	12	16x22°30'
HTP-80-4T	4 / 5.5	900	860	800	360	240	600	12	16x22°30'
HTP-80-4T	7.5 / 10 / 15	900	860	800	550	240	790	12	16x22°30'
HTP-90-4T	7'5 / 10	1015	970	900	420	250	670	15	16x22°30'
HTP-90-4T	15 / 20 / 25 / 30	1015	970	900	650	250	900	15	16x22°30'
HTP-100-4T	15 / 20	1115	1070	1000	550	270	820	15	16x22°30'
HTP-100-4T	25 / 30 / 40	1115	1070	1000	700	270	970	15	16x22°30'
HTP	-125	1360	1311	1258	-	-	810	14	20x18°


EXAMPLE OF SELECTION

Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.

Pe= Static pressure in mm.w.c., Pa and inwg.

HTP-63-4T

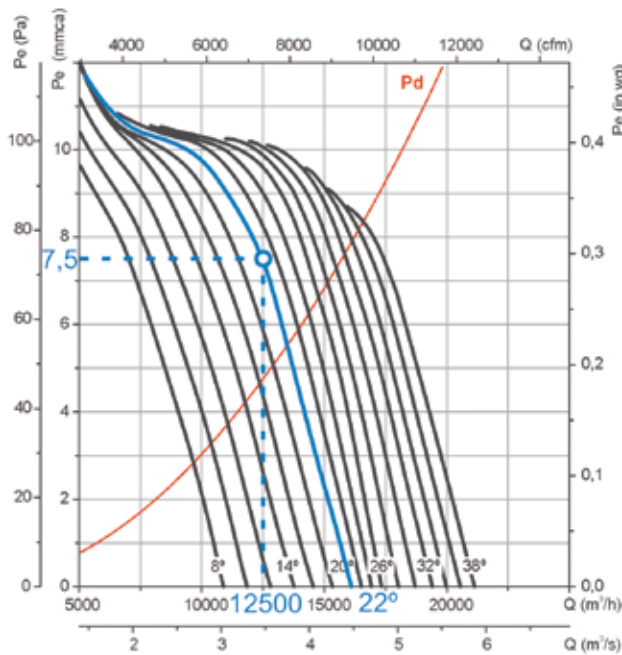

Initial data

- Working point:
- Airflow: 12,500 m³/h
- Loss of load: 7.5 mm w.c.


Steps for the selection of equipment

On the pressure graph:


1. Mark the working point, defined by the airflow (12,500 m³/h) and the loss of load (7.5 mm w.c.).
2. Select the curve of the equipment which is closest above the working point. In our case, a curve with a blade angle of 22° is obtained.

On the power graph:

3. Mark the working point, defined by the airflow (12,500 m³/h) and the selected blade angle (22°).
4. Read the absorbed power on the power axis on the left. Pa= 560 W at the working point.
5. Look for the straight red line which is closest to the working point above. On the right-hand side of the graph, the value of the installed motor power is obtained. In our case, this is 0.75 kW or 1 CV.

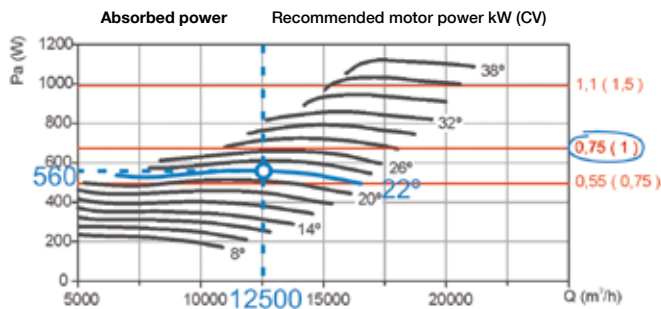

EXAMPLE OF ORDER CODE

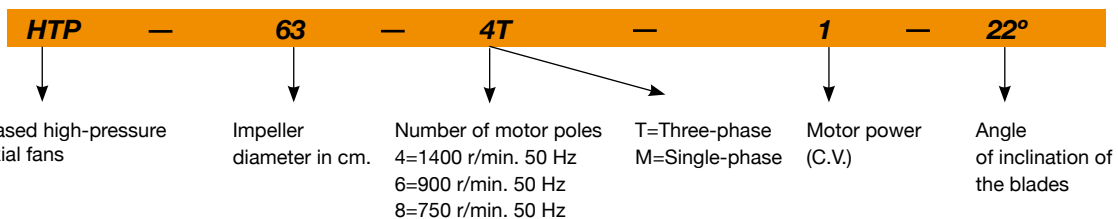


Characteristic curves


Q = Airflow in m³/h, m³/s and cfm.

Pe = Static pressure in mm.w.c., Pa and inwg.

HTP-50-2T

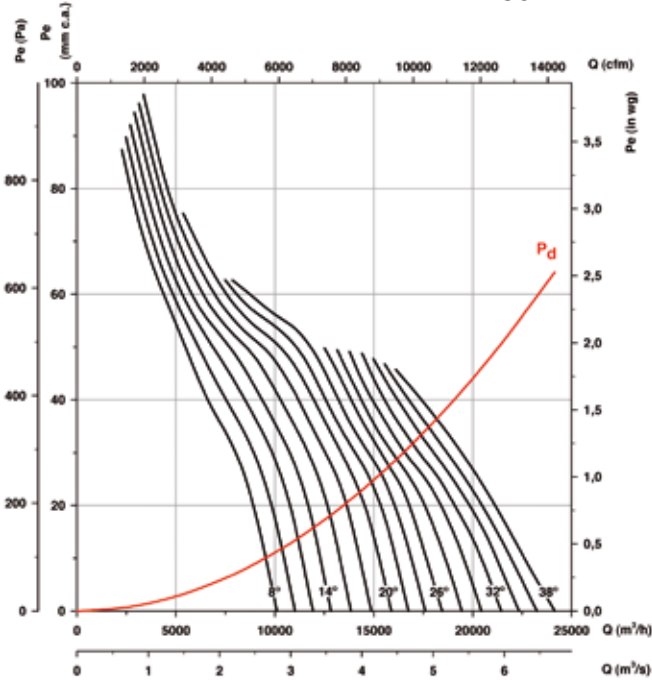


HTP-56-2T

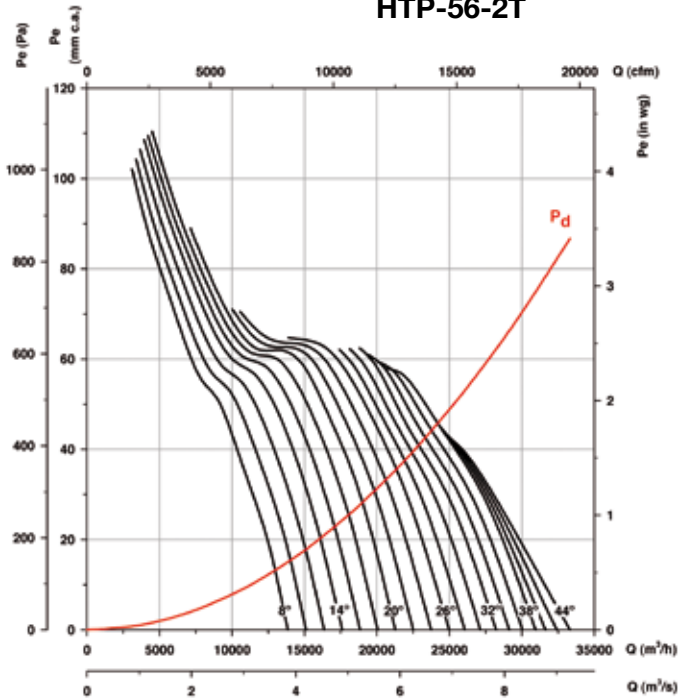


Absorbed power

Recommended motor power kW (CV)

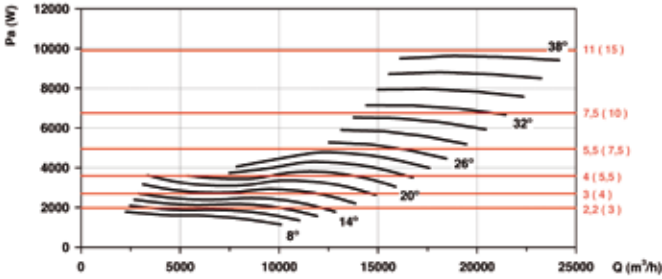

Absorbed power


Recommended motor power kW (CV)

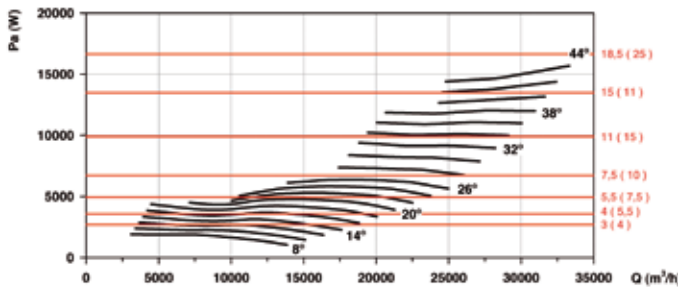

Characteristic curves


Q = Airflow in m³/h, m³/s and cfm.

Pe = Static pressure in mm.w.c., Pa and inwg.

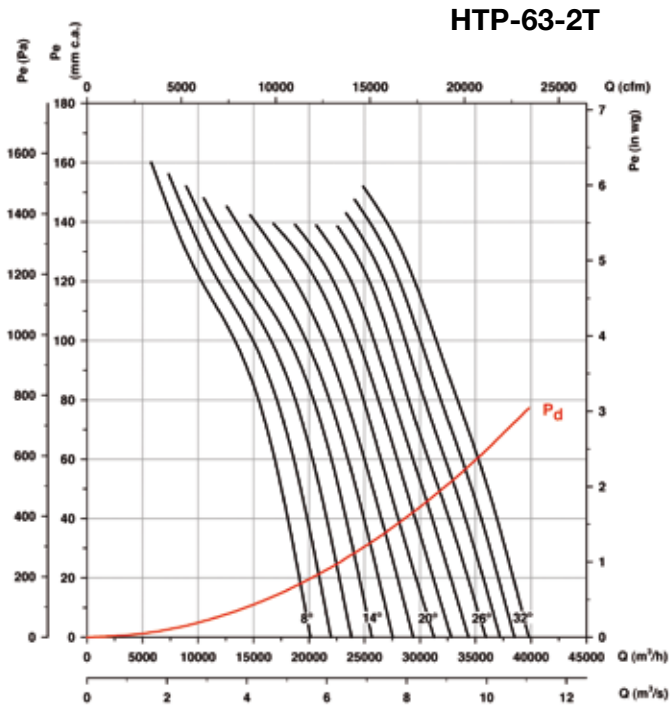



Absorbed power

Recommended motor power kW (CV)

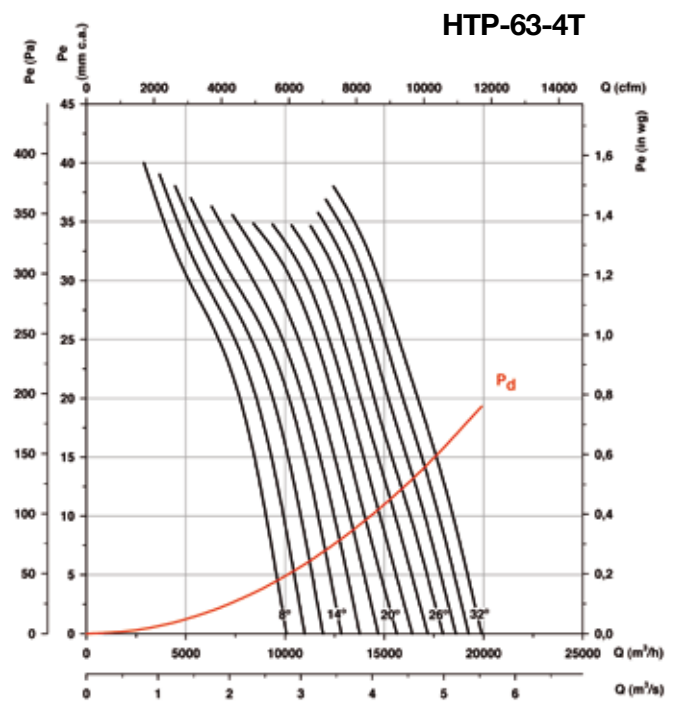

Absorbed power

Recommended motor power kW (CV)

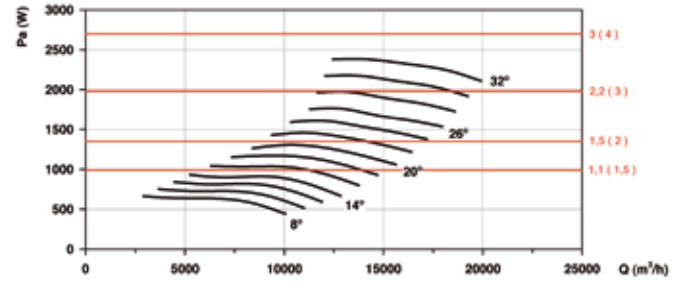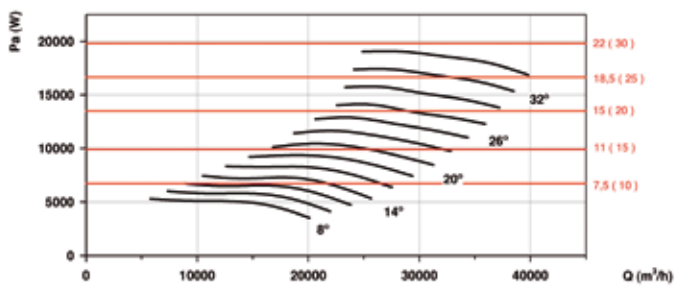


Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.

Pe = Static pressure in mm.w.c., Pa and inwg.


HTP-71-2T

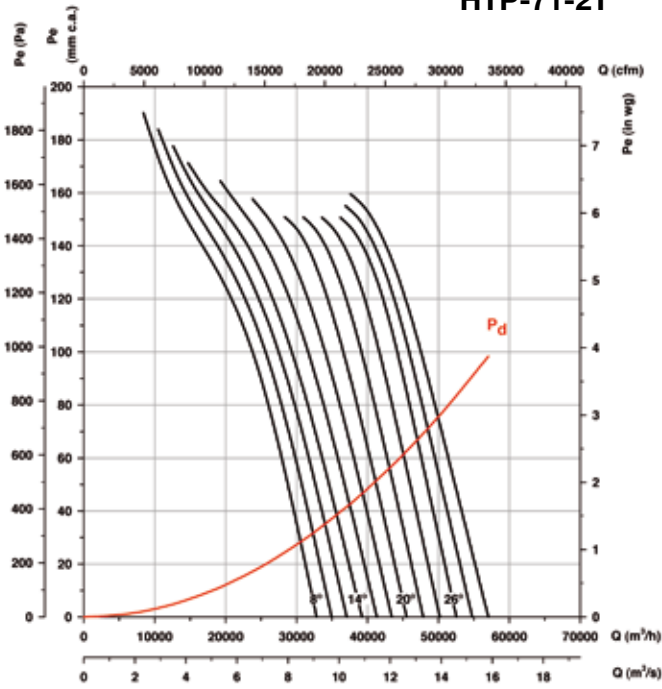

Absorbed power



Recommended motor power kW (CV)

HTP-71-4T

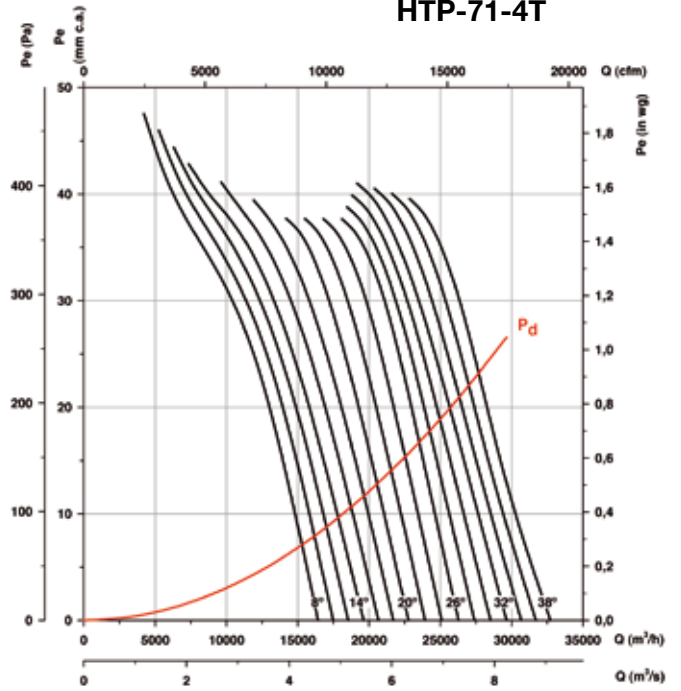

Absorbed power





Recommended motor power kW (CV)

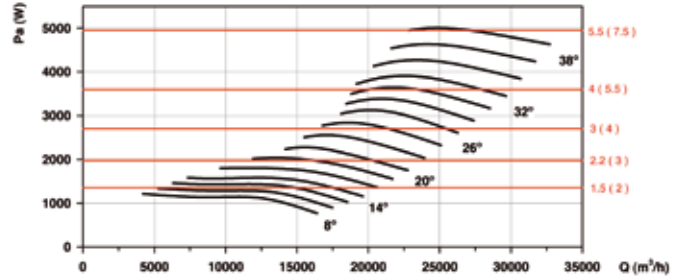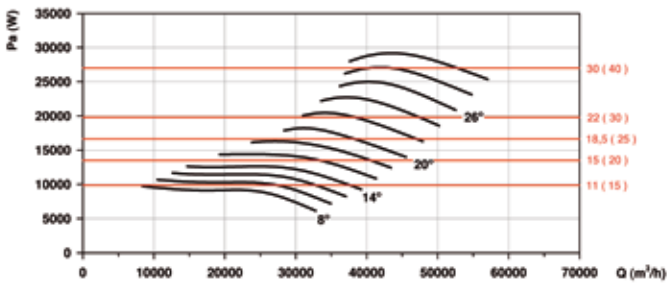

Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.


Pe = Static pressure in mm.w.c., Pa and inwg.

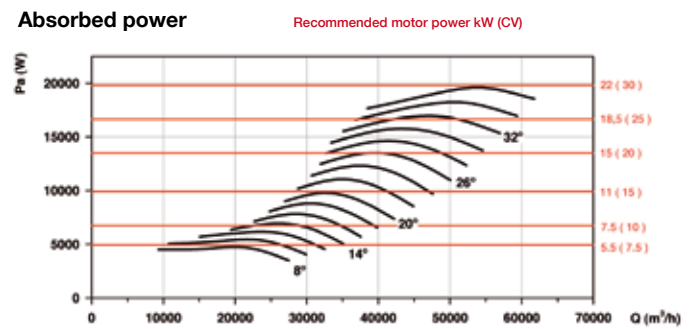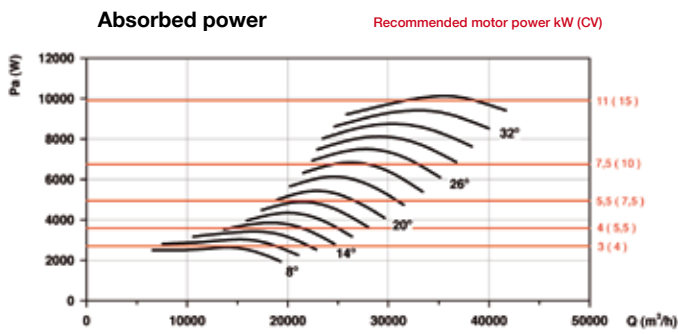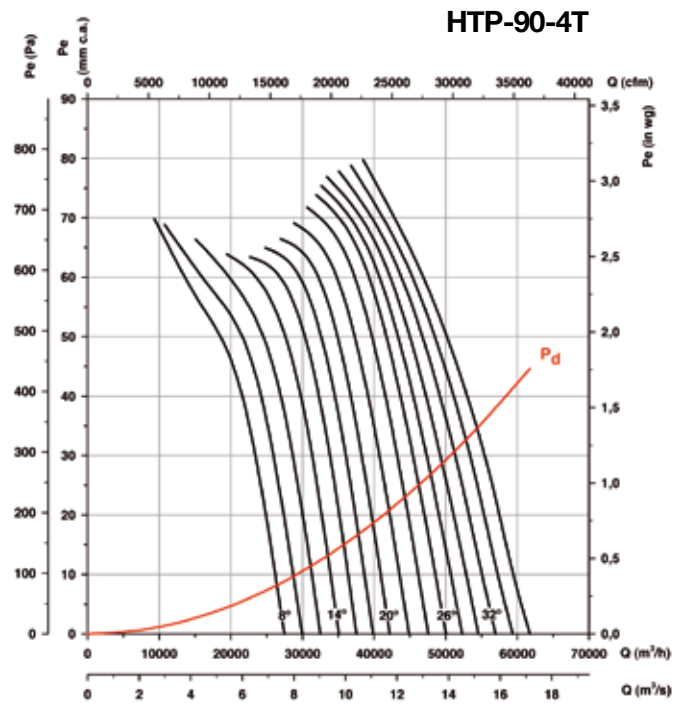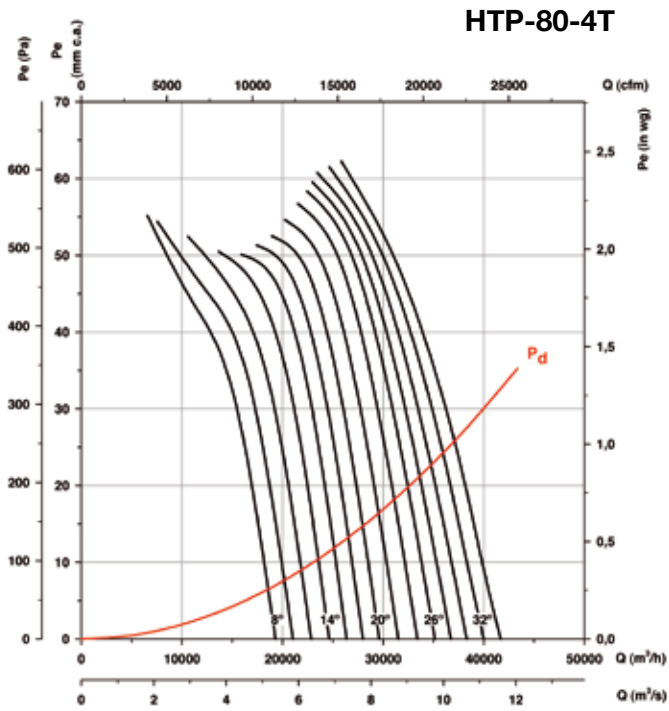

Characteristic curves


Q = Airflow in m³/h, m³/s and cfm.

Pe= Static pressure in mm.w.c., Pa and inwg.

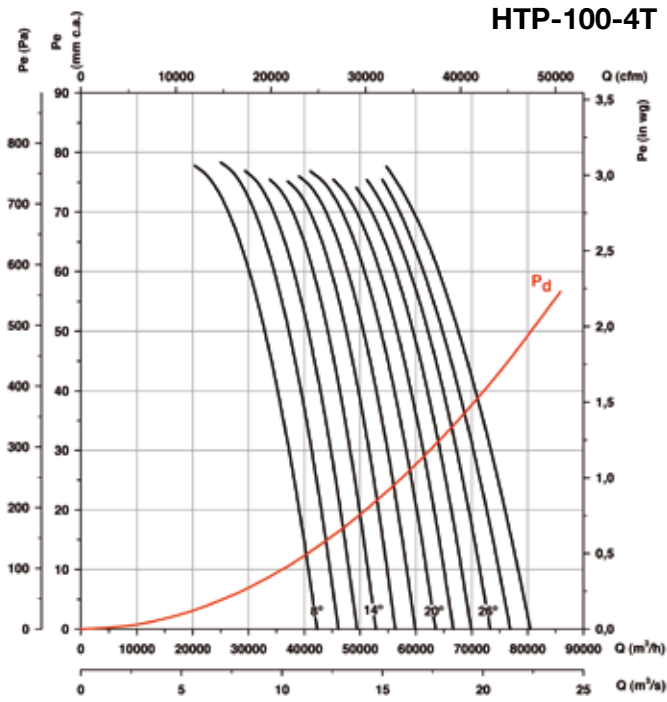



Absorbed power

Recommended motor power kW (CV)

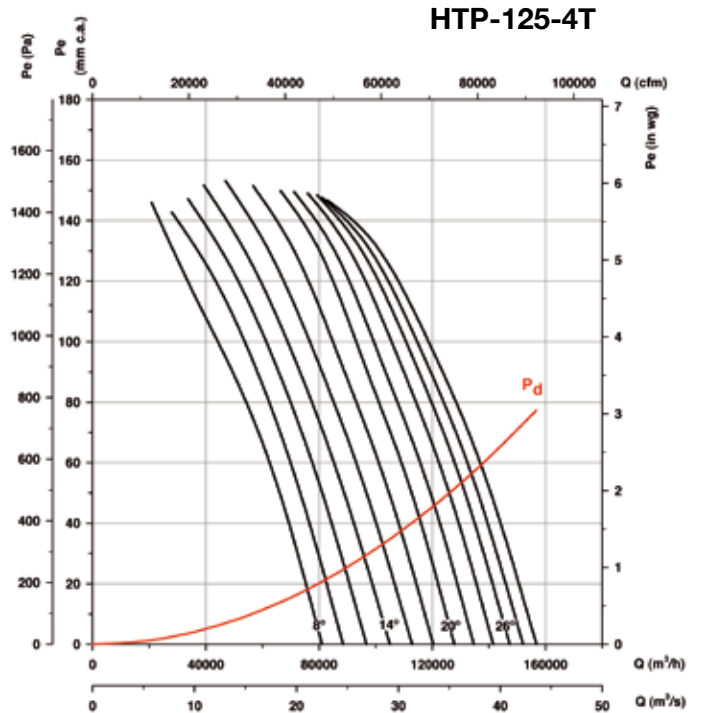

Absorbed power

Recommended motor power kW (CV)

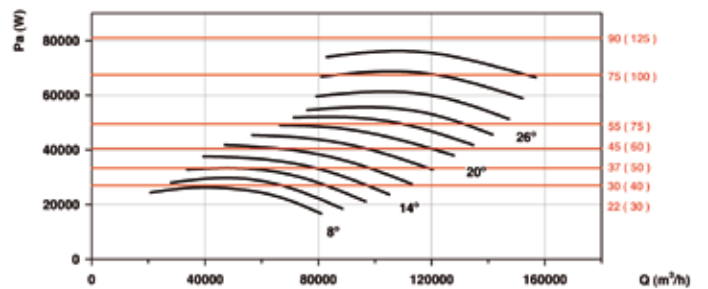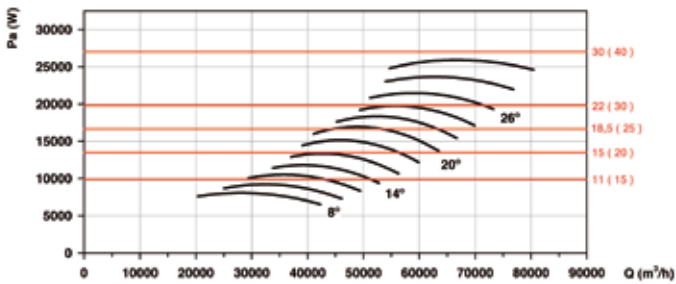

Accessories

See accessories section.



INT

AR

RFT/RFM

PANELS

PL

P

RT

BTUB

BAC

PS

S

SI

HBA

Forked tubular axial fans with motor outside the air flow



Forked tubular fans for moving air of up to 150°C continuously and up to 200°C sporadically

Fan:

- Sheet steel long casing.
- Impeller made from cast aluminium
- Airflow direction from impeller to motor

Motor:

- Single-phase two-speed motors with IE-2 efficiency, except lower powers 0.75 kW.
- Class F motors with ball bearings, IP-55 protection
- Three-phase 230/400V.-50Hz. (up to 5.5CV.) and 400/690V.-50Hz. (power over 5.5CV.)
- Working temperature: -25°C. + 150°C


Finish:

- Anticorrosive with heat-protection paint for working in hot environments

On request:

- Casing made from stainless steel
- Hot galvanised finish
- Special windings for different voltages and motors with PTC

Order code

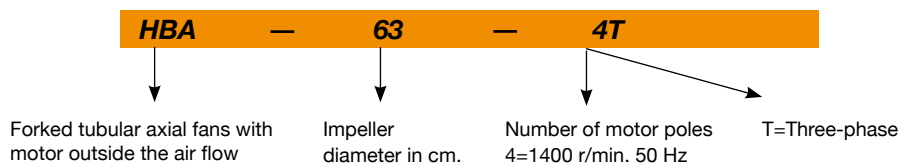

Technical characteristics

Model	Speed (r/min)	Maximum admissible current (A)		Installed power (kW)	Maximum airflow (m³/h)	Sound pressure level dB(A)	Approx. weight (Kg)
		230V	400V				
HBA-31-2T	2880	2.24	1.29	0.55	2900	77	25
HBA-31-2M	2810	3.50	-	0.55	2900	77	26
HBA-31-4T	1365	1.25	0.72	0.25	1600	66	24
HBA-31-4M	1380	2.15	-	0.25	1600	66	25
HBA-40-2T	2870	4.35	2.50	1.10	6200	82	45
HBA-40-2M	2810	6.80	-	1.10	6200	82	46
HBA-40-4T	1375	1.67	0.96	0.37	3200	75	40
HBA-45-2T	2920	10.09	5.80	3.00	8550	84	57
HBA-50-4T	1415	2.87	1.65	0.75	6750	76	73
HBA-63-4T	1435	4.17	2.40	1.10	11150	77	91
HBA-71-4T	1445	15.30	8.80	4.00	15850	79	164
HBA-71-6T	905	2.75	1.58	0.55	11200	74	140
HBA-80-6T	935	5.22	3.00	1.10	14900	77	190
HBA-100-6T	935	5.22	3.00	1.10	21700	80	260

Accessories

See accessories section.



INT

AR

RFT/RFM

PANELS

RT

BTUB

BAC


PS

S


SI

Dimensions in mm

HBA-31..0,50

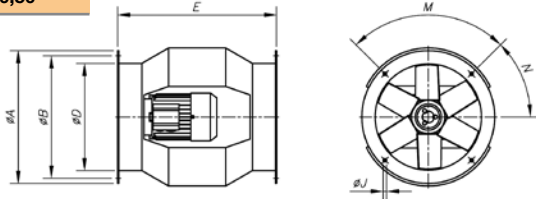

HBA-63...100



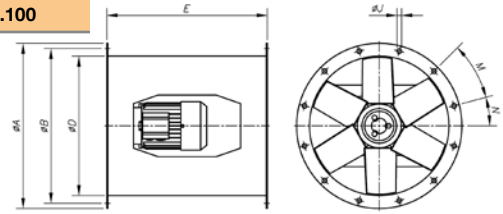


Model	ØA	ØB	ØD	E	ØJ	M	N
HBA-31	385	355	308	460	10	4x90°	45°
HBA-40	490	450	410	580	12	8x45°	22'5°
HBA-45	540	500	460	640	12	8x45°	22'5°
HBA-50	600	560	514	730	12	12x30°	15°
HBA-63	730	690	640	730	12	12x30°	15°
HBA-71	810	770	710	770	12	16x22'5°	11'25°
HBA-80	900	860	800	830	12	16x22'5°	11'25°
HBA-100	1115	1070	1000	1270	15	16x22'5°	11'25°

Characteristic curves

Q = Airflow in m³/h, m³/s and cfm.

Pe = Static pressure in mm.w.c., Pa and inwg.

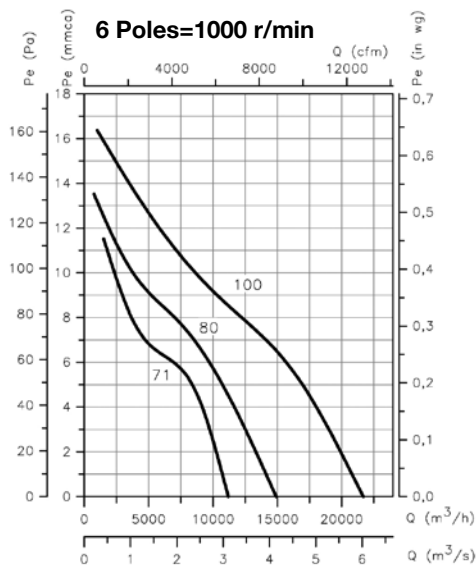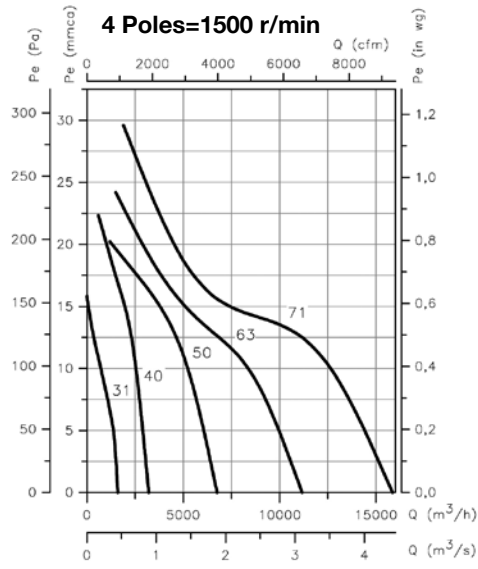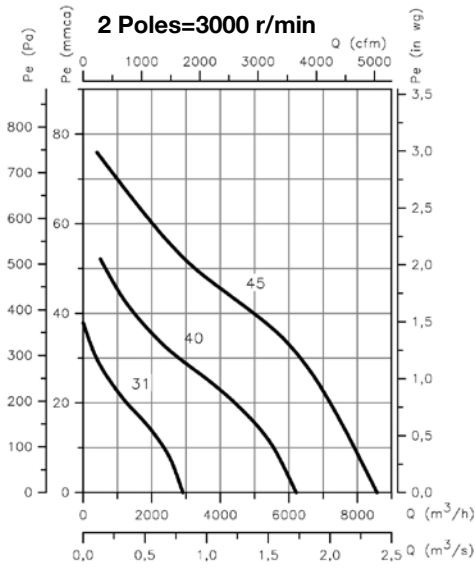

AXIAL FANS
AND
ROOF FANS



CENTRIFUGAL FANS
AND IN-LINE
DUCT EXTRACTOR



FANS FOR
SMOKE
EXTRACTION



FANS FOR ATEX
EXPLOSIVE ATMOSPHERES
AND OTHER APPLICATIONS



NEW SERIES - NEW PRODUCTS NEW CATALOGUES



NEW BUSINESS OPPORTUNITIES

LOW-PRESSURE
CENTRIFUGAL FANS



HEAT RECOVERY
AND
FILTRATION UNITS



AIR CURTAINS
FOR DOMESTIC AND
COMMERCIAL APPLICATIONS



VENTILATION SYSTEM
FOR HOUSES



Ask us for
information

Distributed by:



Crta. de Berga, km 0.7
E-08580 St. Quirze de Besora
BARCELONA (Spain)
Tel. +34 93 852 91 11
Fax. +34 93 852 90 42

comercial@sodeca.com
Export sales: ventilation@sodeca.com
www.sodeca.com

